City of Lakewood, Colorado
Public Works Department
Engineering Division
303-987-7900
www.lakewood.org

NORTH

Scale: 1" = 1000'

SECTION BREAKDOWN INFORMATION

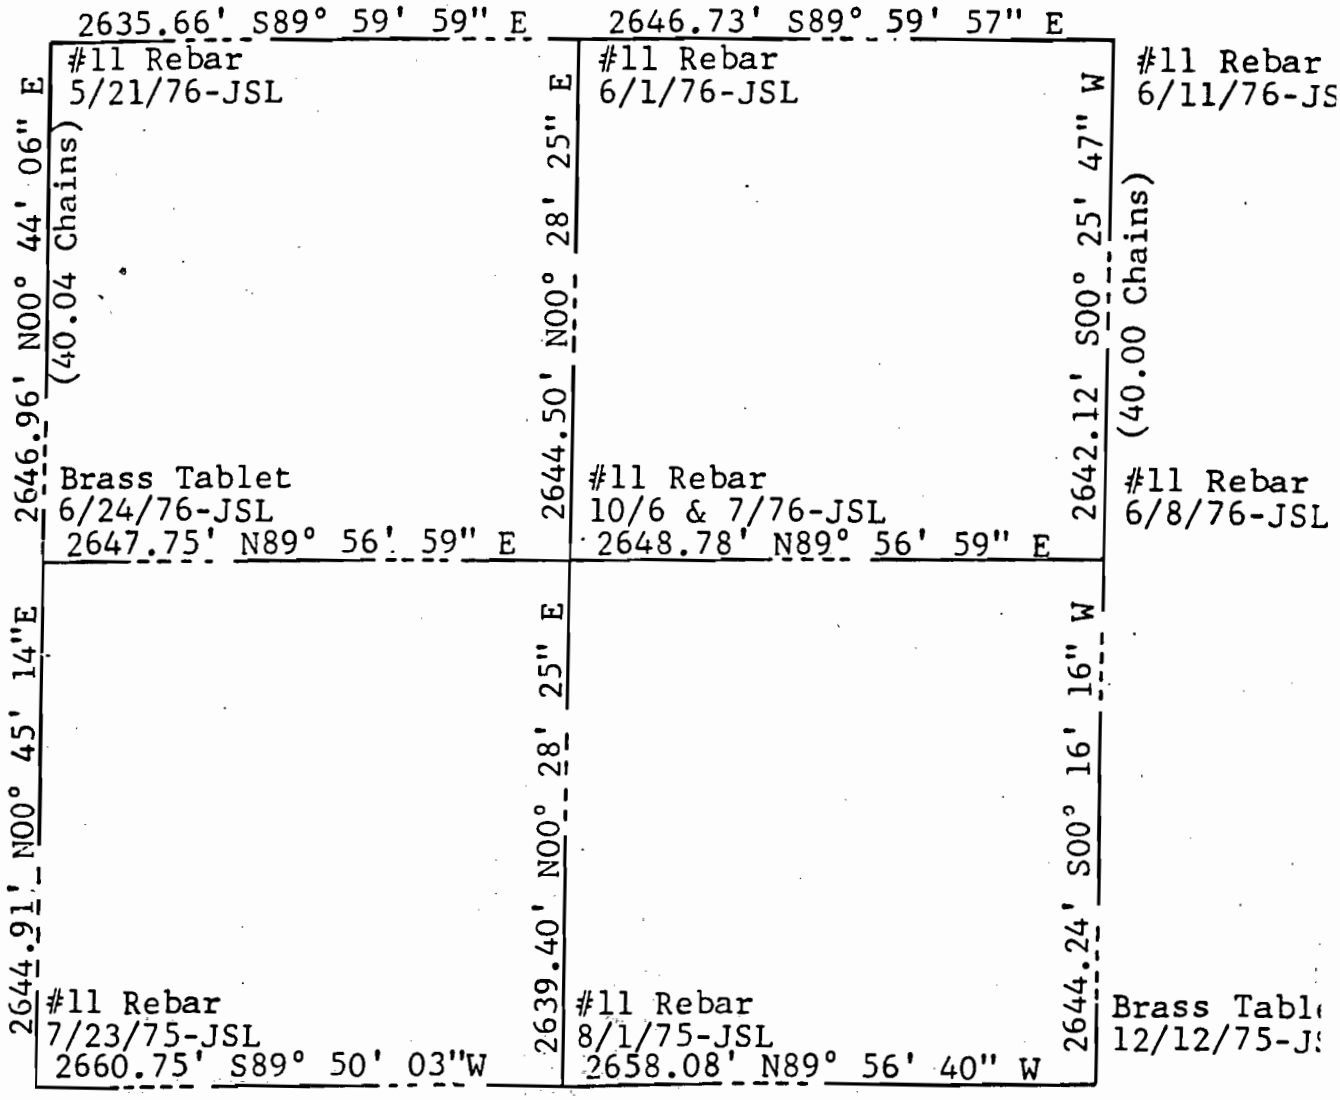

ANGULAR ERROR OF CLOSURE: 00° 00' 23.5"
LINEAR ERROR OF CLOSURE AFTER ANGULAR ADJUSTMENT: 0.299'
TOTAL TRAVERSE LENGTH: 21788.756'
SURVEY PRECISION: 1' in 72784'
JOB NO. AP2776

SECTION 1 ,TOWNSHIP 4 SOUTH, RANGE 69 WEST
DATA BY: STEVE STEINBERGER
DATE: FIELD WORK June 15, and 16, 1976
BASIS OF BEARINGS: North Line of Northwest ¼
Assumed S89° 59' 59" E